

NOBLELIFT

Material Handling

We promise, We deliver

PTE20-C Electric pallet truck

PTE20-C is a walkie and station type combined full-electric pallet truck with a rated capacity of 2000kg. Low energy consumption and long service time make it suitable for material transportation in the medium or long distance such as loading and unloading of goods in factories, warehouses, docks, etc.



PTE20-C

Electric pallet truck



Noblelift Headquarters

Add:#528 Changzhou Road,Taihu
Sub-district,Changxing,313100,China
TEL:+86 572 6210311/6120989
FAX:+86 572 6129336
WEB:www.noblelift.com
Email: info@noblelift.com



Official website



Our Wechat

Noblelift North America Corp.


Add:2461 S Wolf Road, Des Plaines, IL 60018
Tel:847-595-7100
Fax:847-595-7200
Email:sales@nobleliftna.com
Http: www.nobleliftna.com

Noblelift Europe GmbH

Add:Borsigstrasse 9d-93092 Barbing
Germany
TEL:+49 9401 607930
FAX:+49 9401 6079329
WEB:www.noblelifteurop.com
Email: mail@noblelifteurope.com

Noblelift Russia

ООО "Ноблелифт Рус"
194292, Санкт-Петербург
Домостроительная ул. 4А офис 301
Бизнес-центр "Парнас"
тел.: +7 (800) 700-28-97
Email: sales@noblelift.com.ru

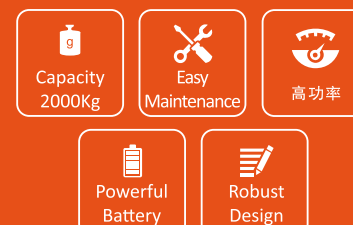

NEW/ARRIVAL

Noblelift Products

NOBLELIFT INTELLIGENT EQUIPMENT CO., LTD

www.noblelift.com

Turtle Speed

Smart Pin Code

Battery Discharge Indicator
Operating Hour Counter
On-board diagnostics via the error

BACK

Emergency-reverse & Horn Buttons

Dual butterfly-style thumb driving controls

Electric lifting and lowering

FRONT

Comfortable operation, optimize operator's comfort. All the switch buttons are integrated in the humanized touch position for easy operation.(Integrated pin code, hour meter, battery discharge indicator, fault code display , turtle speed)



One-time forming steel battery cover and concave-convex design increase the strength of the cover, minimize maintenance and battery damage, and can be used as a storage tray. Equipped with a built-in handle makes operation more safe and convenient. Equipped with 160AH lead-acid battery, the working hours can last more than 7 hours.



Adopt 1.3KW AC horizontal drive and equipped with 250x80 drive wheel ensure stronger carrying capacity; high power and accelerated stability, low maintenance cost as no need to replace the carbon brush; good ramp starting performance. Both sides are equipped with spring regulating structure stability castors ensure better wear resistance and stability.



Additional entry rollers ensure easy pallet entry and prevent possible damages.



Adopt integrated ZAPI control technology simplifies the circuit and enhance the reliability of the whole truck.



Innovative appearance with the upper cover's groove design makes it easy to storage.



Convenient disassembly structure, robust chassis with strong 8mm thick apron can effectively protect the body and internal parts from external mechanical impact.



The foldable pedal has a good shock absorption effect which makes the operator easier to operate and less prone to fatigue.



Type sheet for industrial truck acc. to VDI2198			
Distinguishing mark			
1.2	Manufacturer's type designation		PTE20-C
1.3	Drive		Battery
1.4	Operator type		Pedestrian/Stand
1.5	Load capacity/Rated load	Q (t)	2.0
1.6	Load centre distance	c (mm)	600
1.8	Load distance,centre of drive axle to fork	x (mm)	892
1.9	Wheelbase	y (mm)	1375
Weight			
2.1	Service weight	kg	650
2.2	Axle loading, laden front/rear	kg	1010 / 1640
2.3	Axle loading, unladen front/rear	kg	520 / 130
Tires, chassis			
3.1	Tires		Polyurethane(PU)
3.2	Tire size,front	Øxw (mm)	Ø 250×80
3.3	Tire size,rear	Øxw (mm)	Ø 82×110/84×84
3.4	Additional wheels(dimensions)	Øxw (mm)	Ø 100×40
3.5	Wheels,number front/rear(x=driven wheels)		1x+2/4
3.6	Tread,front	b ₁₀ (mm)	560
3.7	Tread,rear	b ₁₁ (mm)	367/512
Dimensions			
4.4	Lift	h ₃ (mm)	120
4.9	Height of tiller in drive position min./max.	h ₁₄ (mm)	900 /1395
4.15	Height, lowered	h ₁₃ (mm)	85
4.19	Overall length	l ₁ (mm)	1900
4.20	Length to face of forks	l ₂ (mm)	750
4.21	Overall width	b ₁ (mm)	820
4.22	Fork dimensions	s/e/l (mm)	60 / 173 / 1150
4.25	Width across forks	b ₂ (mm)	540/685
4.32	Ground clearance, centre of wheelbase	m ₂ (mm)	25
4.33	Aisle width for pallets 1000X1200 crossways	Ast (mm)	2110
4.34	Aisle width for pallets 800X1200 lengthways	Ast (mm)	2160
4.35	Turning radius	Wa (mm)	1740
Performance data			
5.1	Travel speed,laden unladen	km/h	5.5 / 6.0
5.2	Lift speed,laden/unladen	m/s	0.025 / 0.030
5.3	Lowering speed,laden/unladen	m/s	0.030 / 0.025
5.8	Max. gradeability, laden/unladen	%	8 / 15
5.10	Service brake		Eletromagnetic
Electric-engine			
6.1	Drive motor rating S2 60min	kW	1.3
6.2	Lift motor rating at S3 10%	kW	0.8
6.3	Battery acc. to DIN 43531/35/36A,B,C,norm		/
6.4	Battery voltage,nominal capacity K5	V / Ah	24 / 160
6.5	Battery Weight(+/-5%)	kg	155
6.6	Energy consumption acc. to VDI cycle	kWh/h	0.32
Additional data			
8.1	Type of drive control		AC speed Control
8.4	Sound level at driver's ear acc. to EN 12053	dB(A)	69

1) The bearing wheel is in the lowest position:+65mm